

A

B

C

D

E

F

G

H

A

B

C




D

E

F

G

H

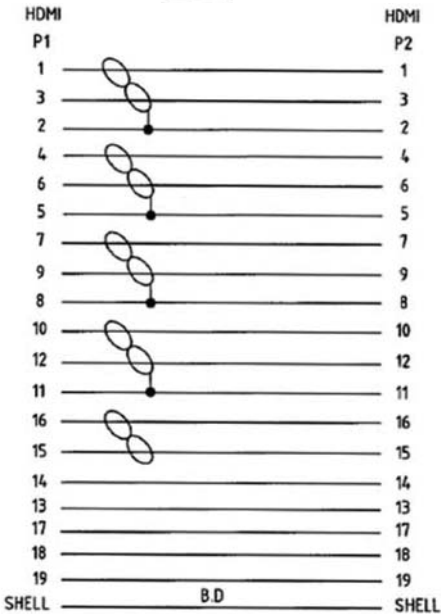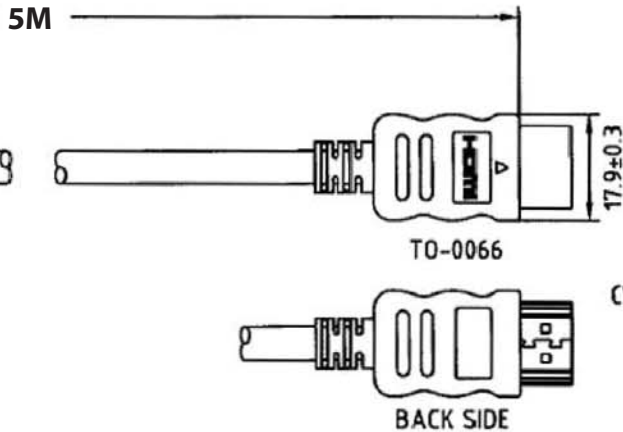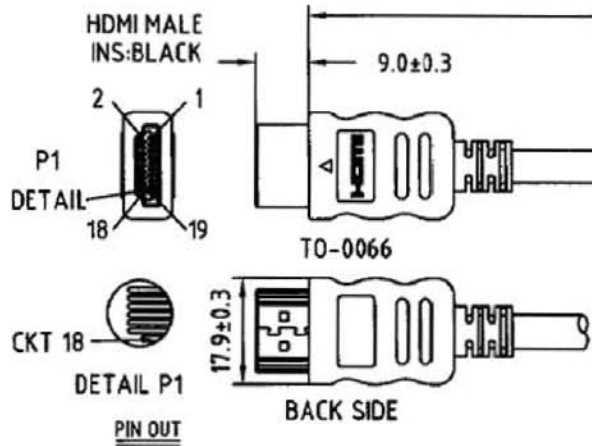

**Material:**

- Cable: UL-20276 [#28(7/0.103 T.C)x1P INS: FO-SKIN +D.W(7/0.103 T.C) + AL/MY(spread the Wring)]x4C+#28(7/0.103 T.C)x1P INS:HD-PE+#28(7/0.103 T.C)x5C INS:HD-PE+AL/MY+ Drain Wire(7/0.103 T.C)  
B.D(85%) PVC Jacket, OD: 6.0±0.2MM color: Black(NK-K01)
- Connector: P1&P2: HDMI 19P Male Contact: 30μ"; Nickel Plated Shell
- Shield: P1&P2: Inner mold must be wrapped copper to connector shell & cable braid
- Hood: P1&P2: Molded Type, PVC 45P, Color: Black(NK-K01).

**Electrical:**

- 100% Short, open & miswire test
- Contact Resistance: 3Ω Max.
- Insulation Resistance: 10Ω Min.
- Hi-Pot Voltage: 300V DC



Scale	1:1							Name
TOLERANCE					Drawn	10.21.11	Chappell	Item No. <b>AK627-5-R</b>
X.X	±0.40				Approved	10.24.11	Warner	
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
								Drawing No.
								<b>rev00</b>
				Modification				Date