



## VRLA Rechargeable Battery

# BC10-12

### FEATURES

- Maintenance free(no water topping-up required)
- No free acid(Non-spillable battery)
- Can be used in any orientation(excluding used inverted)
- Absorbent Glass Mat technology for efficient gas recombination
- Its design life is up to 5 years in floating application

### APPLICATION

- UPS
- Laboratory
- Equipment



### SPECIFICATIONS

Nominal Voltage	12V	
Nominal Capacity	20 Hour Rate (500mA, 10.5V)	10.0 Ah
	10 Hour Rate (950mA, 10.5V)	9.50 Ah
	5 Hour Rate (1700mA, 10.5V)	8.50 Ah
	1 Hour Rate (6000mA, 9.30V)	6.00 Ah
Approx. Weight	3000g(6.61lbs.)	
Terminals	T2 (Faston Tab 250) T1 is optional	
Max. Discharge Current	150 A (5 sec.)	
Max. Charge Current	3.00 A	
Operating Temperature Range	Charge	0°C~40°C(32°F~104°F)
	Discharge	-20°C~50°C(-4°F~122°F)
	Storage	-20°C~40°C(-4°F~104°F)
Self Discharge	< 3% per month (25°C)	
Internal Resistance	≤17mΩ (Fully Charged )	

### CONTAINER MATERIAL

- Standard: ABS( UL 94-HB)  
Model: BC10-12 (Dark gray color)
- Optional: ABS(UL 94-V0)  
Model: BC10-12FR (Light gray color)




UL



CE


- IEC 61056-1
- JIS C 8702-1
- GB/T 19639.1

OUTER DIMENSIONS mm(inch)	Length (L)	Width (W)	Container Height (H)	Total Height (TH)
		151±1.5(5.94±0.06)	65±1.5(2.56±0.06)	112±1.5(4.41±0.06)

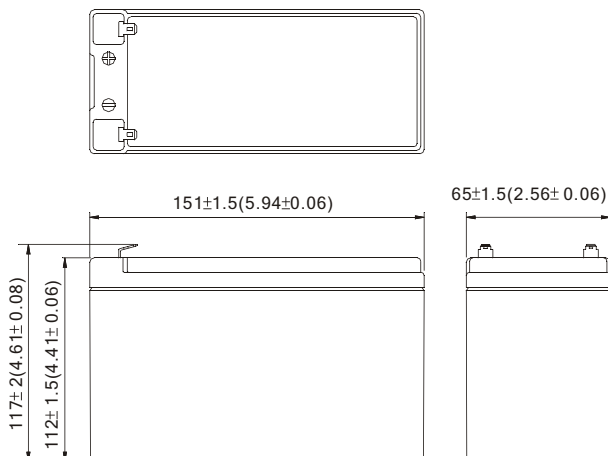


### TERMINAL TYPE


● Terminal T1




● Terminal T2



**BC10-12 (BC10-12FR) discharge characteristics (25°C /77°F)**

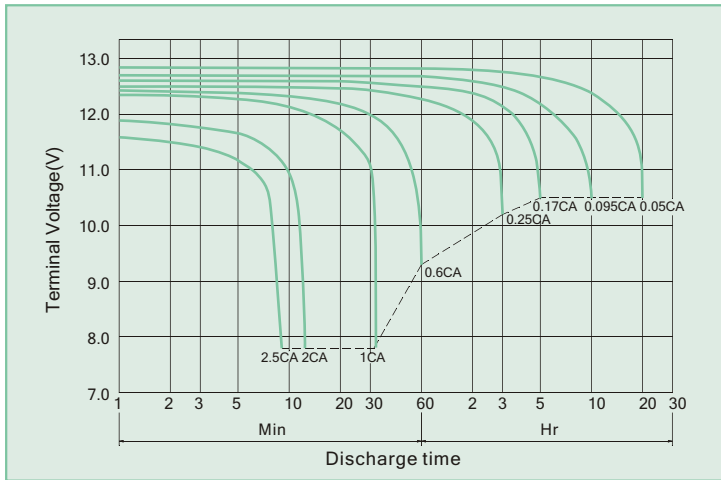


**Battery Charging Characteristics**

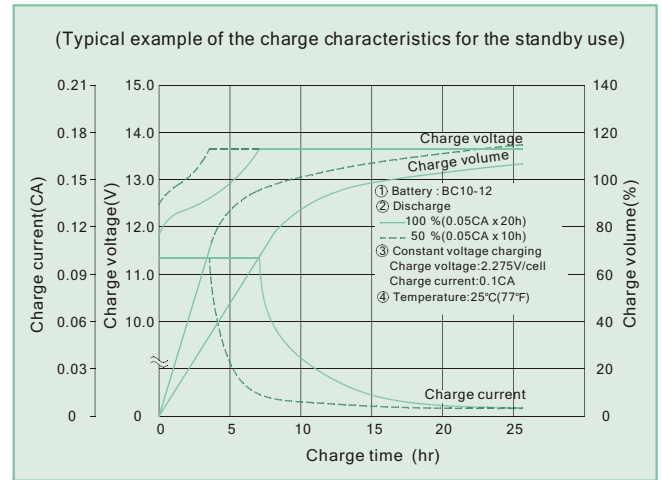

**Charging Procedure**

Application	Charging method	Charging Voltage at 25°C (V/cell)	Temperature compensation coefficient of charging voltage (mV/°C /cell)	Max. charging current (CA)	Charging time 0.1CA, 25°C (h)		Temp (°C)
					100% discharge	50% discharge	
For standby power Source	Constant voltage & Constant current charging (with current restriction)	2.25~2.30	-3	0.3	24	20	0~40 (32~104°F)
For cycle service		2.40~2.50	-4	0.3	16	10	

**Effect Of Temperature On Long Term Float Life**

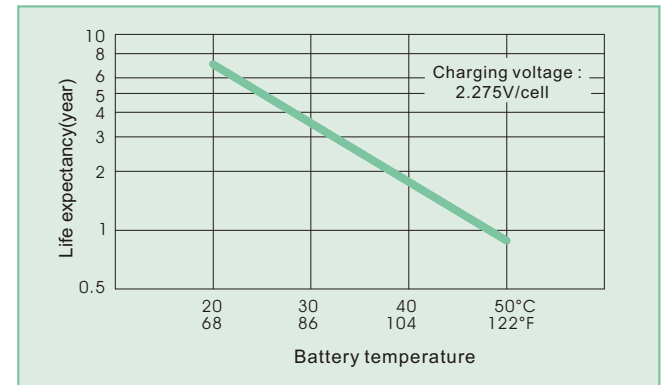

**Constant power discharge characteristics at 25 °C/77 °F Unit: W**

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	361.6	266.2	213.3	126.9	72.78	29.15	20.10	11.23	5.91
1.75V	418.5	288.4	223.1	131.7	74.96	29.73	20.40	11.40	6.00
1.70V	444.6	298.7	230.0	134.7	76.31	30.00	20.51	11.46	6.04
1.65V	464.6	305.9	235.3	136.6	77.23	30.21	20.58	11.49	6.05
1.60V	480.0	312.0	240.0	138.0	78.00	30.39	20.64	11.49	6.05

**Constant current discharge characteristics at 25 °C/77 °F Unit: A**

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	32.57	23.43	18.55	10.75	6.12	2.43	1.675	0.936	0.493
1.75V	38.39	25.38	19.40	11.16	6.30	2.48	1.700	0.950	0.500
1.70V	40.79	26.30	20.00	11.42	6.41	2.50	1.709	0.955	0.503
1.65V	42.62	26.93	20.46	11.58	6.49	2.52	1.715	0.958	0.504
1.60V	44.04	27.46	20.87	11.69	6.55	2.53	1.720	0.958	0.504

All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.

A/0 REV. Feb. 2013

**USA:**  
 B&B BATTERY(USA) INC.  
 6415 RANDOLPH ST.COMMERCE, CA,90040 U.S.A.  
 TEL:1-323-278-1900.1-800-278-8599  
 FAX:1-323-278-1268  
 E-Mail:sales@bb-battery.com

**CHINA FACTORY:**  
 B.B. BATTERY CO., LTD.  
 CHENG DONG TRIAL AREA,HUANG GANG,  
 RAOPING, GUANG DONG,CHINA,515700  
 TEL:86-768-7601001-2  
 FAX:86-768-7601469  
 E-Mail:maggy@bb-battery.com

**EUROPE:**  
 B&B BATTERY(EUROPE) B.V.  
 SUITE 8, HAAKSBERGWEG 33, 1101  
 BP AMSTERDAM, THE NETHERLANDS  
 TEL: 31-30-320-0190  
 MOBILE: 852-9128-2711  
 E-Mail: dliu@bb-battery.com

**HONG KONG:**  
 B&B BATTERY(Hong Kong) Co.  
 TEL:852-2311-4918  
 FAX:852-2739-1182  
 E-Mail:bbhk@hkstar.com

**JAPAN:**  
 B&B BATTERY(JAPAN) CO., LTD.  
 1375-11 NARAHARA-MACHI,HACHIOJI,  
 TOKYO 193-0803,JAPAN.  
 TEL:81-426-25-6375  
 FAX:81-426-25-6375  
 E-Mail:miyata@bb-battery.com

**TAIWAN:**  
 B.B. BATTERY(TAIWAN) CO., LTD.  
 TEL:886-6-502-5150  
 FAX:886-6-589-8087  
 E-Mail:kevinlin@bb-battery.com