



| REV. | DESCRIPTION | DATE |
|------|-----------------------|------------|
| A | NEW DRAWING | 9/8/2008 |
| B | CORRECTED RATING TYPO | 01/09/2015 |

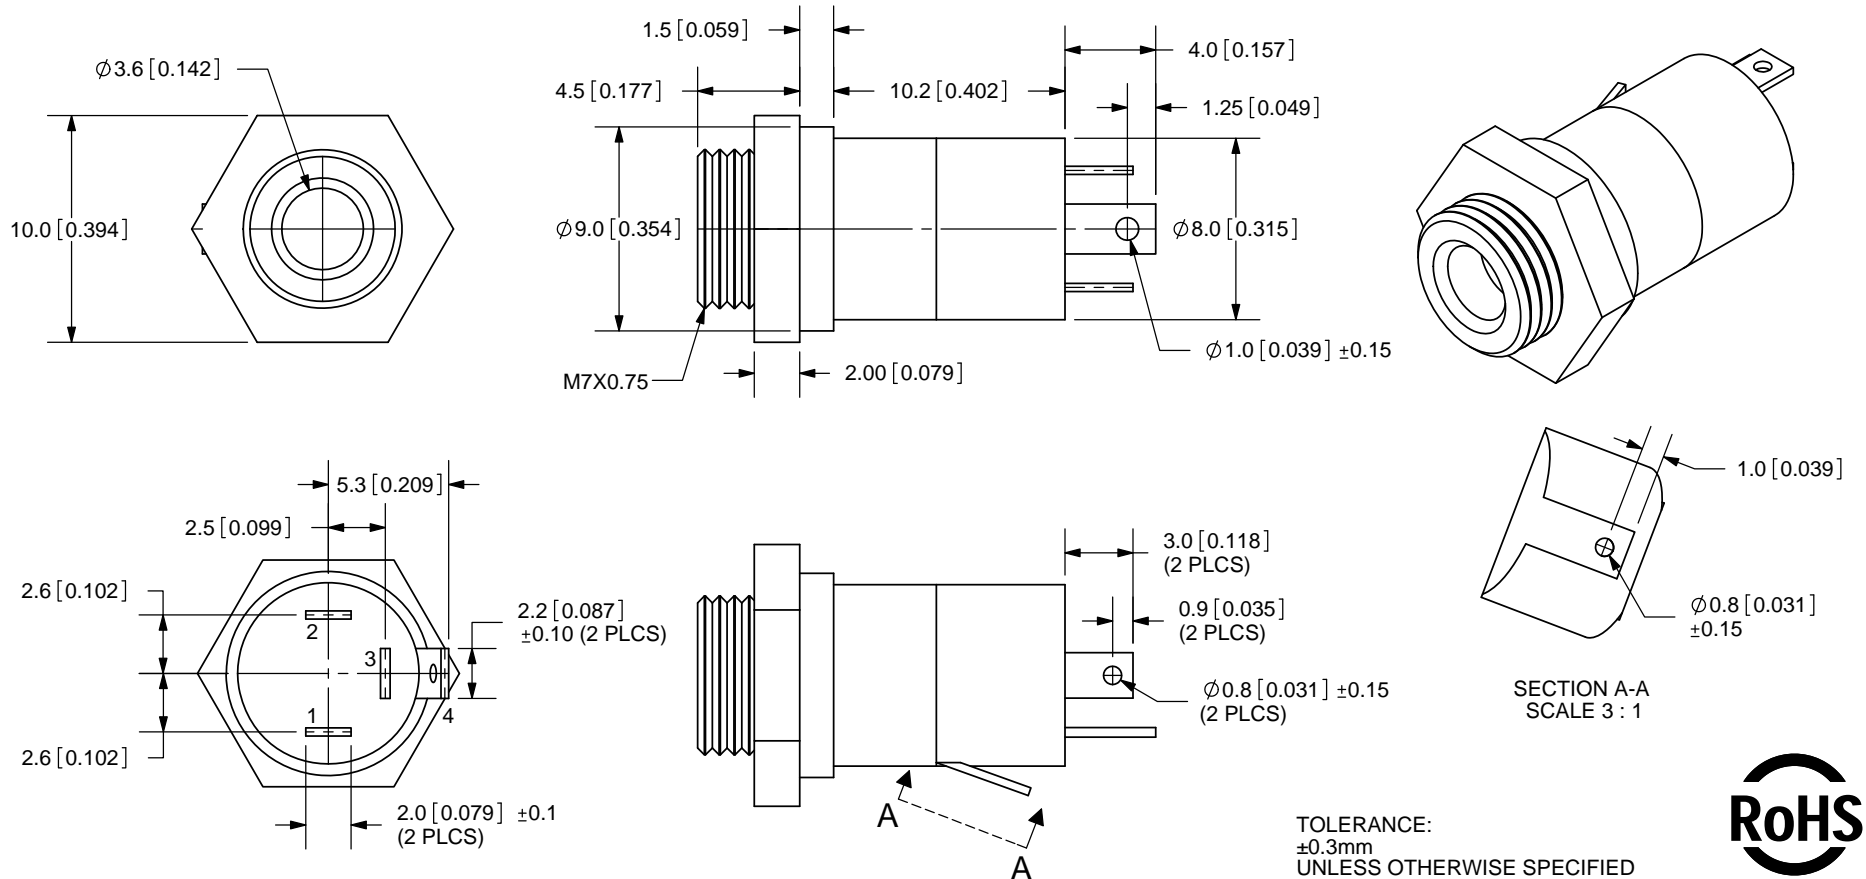

△ SPECIFICATIONS:
 RATING: 16VDC @ 20mA~0.3A
 CONTACT RESISTANCE: 50m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
 VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
 LIFE: 5,000 CYCLES

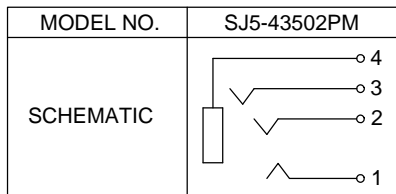

| | MATERIAL | PLATING |
|------------|--------------|---------|
| HEX NUT | Steel | Nickel |
| TERMINAL 1 | Copper Alloy | Gold |
| TERMINAL 2 | Copper Alloy | Nickel |
| TERMINAL 3 | Copper Alloy | Nickel |
| TERMINAL 4 | Copper Alloy | Nickel |
| SHELL | Brass | Nickel |
| HOUSING | PBT | |

TOLERANCE:
 ±0.3mm
 UNLESS OTHERWISE SPECIFIED



20050 SW 112th Ave.
 Tualatin, OR 97062
 Phone: 503-612-2300
 800-275-4899
 Fax: 503-612-2383
 Website: www.cui.com

| | | | |
|-----------|--|--------------|-------------|
| TITLE: | 3.5mm Panel Mount Audio Jack - 4 Connector | REV: | B |
| PART NO. | SJ5-43502PM | UNITS: | MM [INCHES] |
| DRAWN BY: | RDS | APPROVED BY: | |
| | | SCALE: | 3:1 |

PC FILE NAME:
 SJ5-43502PM

COPYRIGHT 2008 BY CUI INC.