



- NOTE
- 1 This product is packaged in tray. (35pcs/tray)
 - 2 Blemish and hit mark can be occurred through out the manufacturing process which doesn't affect quality level. Also, black spot could be observed on the surface of housing.
 - 3 For the contact NO., adjacent two pairs of leads placed back-to-back (4 leads in total) Compose one line.
 - 4 Misalignment absorbing range: ± 0.3mm max.
 - 5 The dimension in parentheses are for references.
 - 6 Lot NO. is indicated at either one of the position as shown.

2	Copper alloy	Contact area: Gold-plating 0.1 μm		4	Polystyrene			
		Lead area: Tin-plating 1.0 μm						
		Under plating: Nickel 1.0 μm						
1	Polyamide	Black UL94V-0		3	Phosphor bronze			
				Tin-plating 3.0 μm				
				Under plating: Nickel 1.0 μm				
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS	
UNITS	mm	SCALE	2 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
APPROVED : HS. OKAWA		14.09.12		DRAWING NO.		EDC3-359157-00		
CHECKED : KN. SHIBUYA		14.09.12		PART NO.		FX30B-3P-7.62DSA20		
DESIGNED : DK. AIMOTO		14.09.12		CODE NO.		CL570-3105-7-00		
DRAWN : DK. AIMOTO		14.09.12						
HRS HIROSE ELECTRIC CO., LTD.								


Recommended hole pattern dimension of PCB(5:1)
(Connector mounting side, PCB thickness: t=1.6mm)

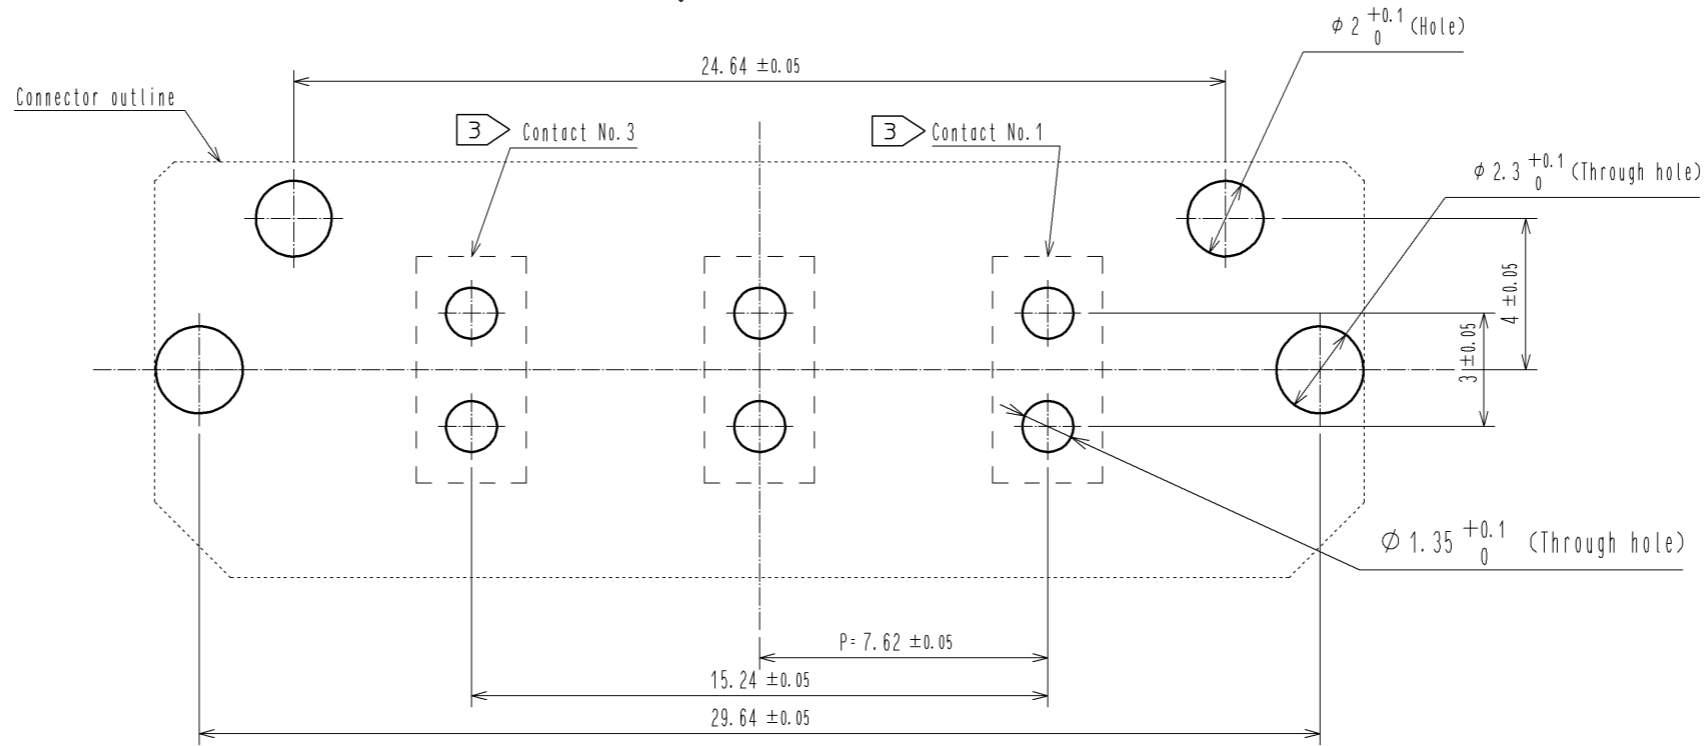

1 Drawing for packaging(1:2)

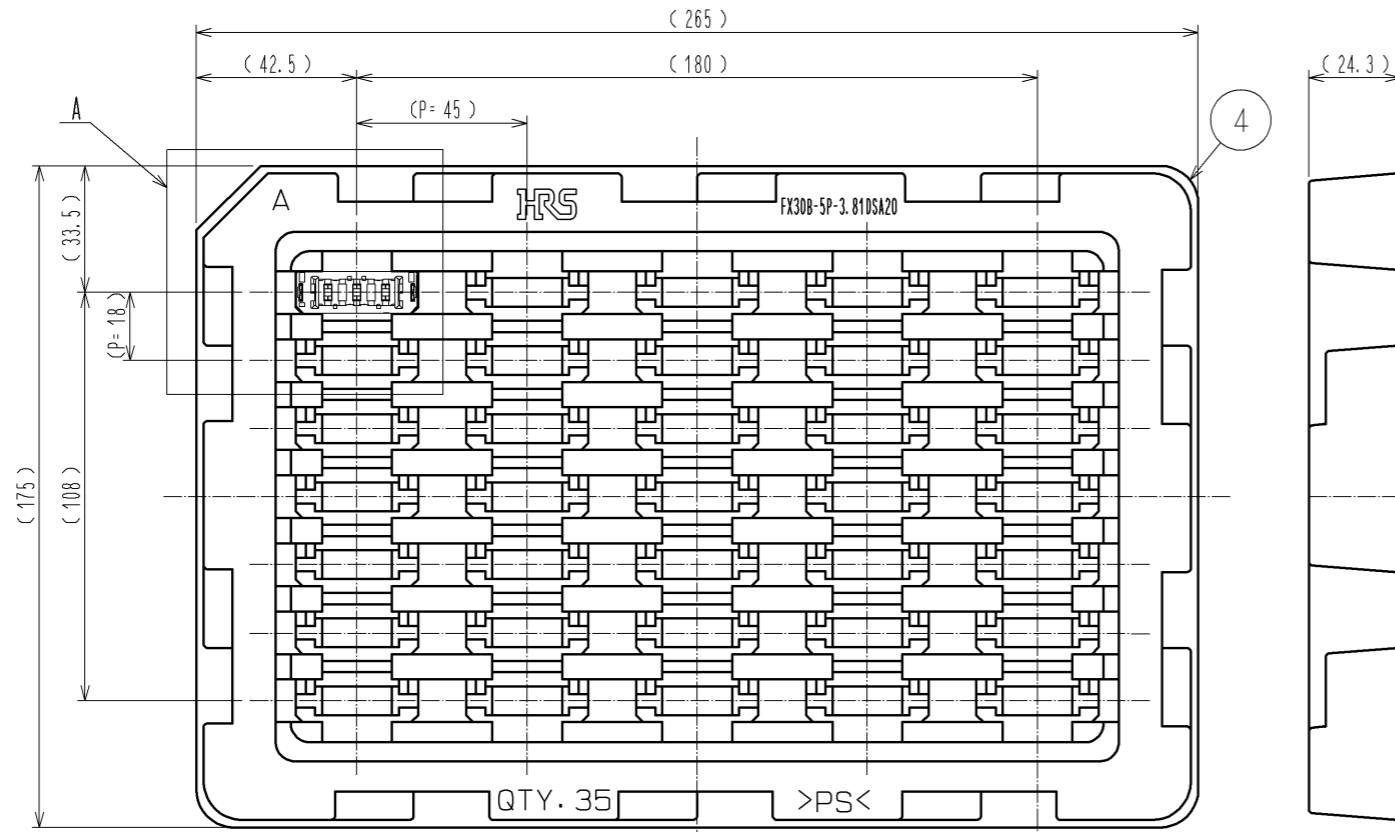

A(1:1)

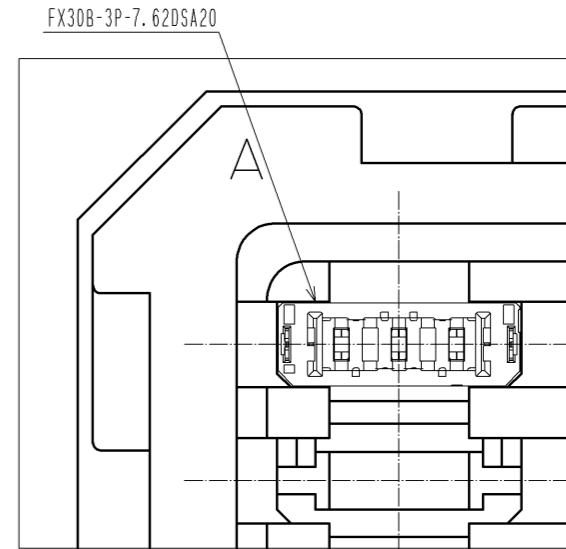

HRS	DRAWING NO.	EDC3-359157-00	
	PART NO.	FX30B-3P-7.62DSA20	
	CODE NO.	CL570-3105-7-00	