
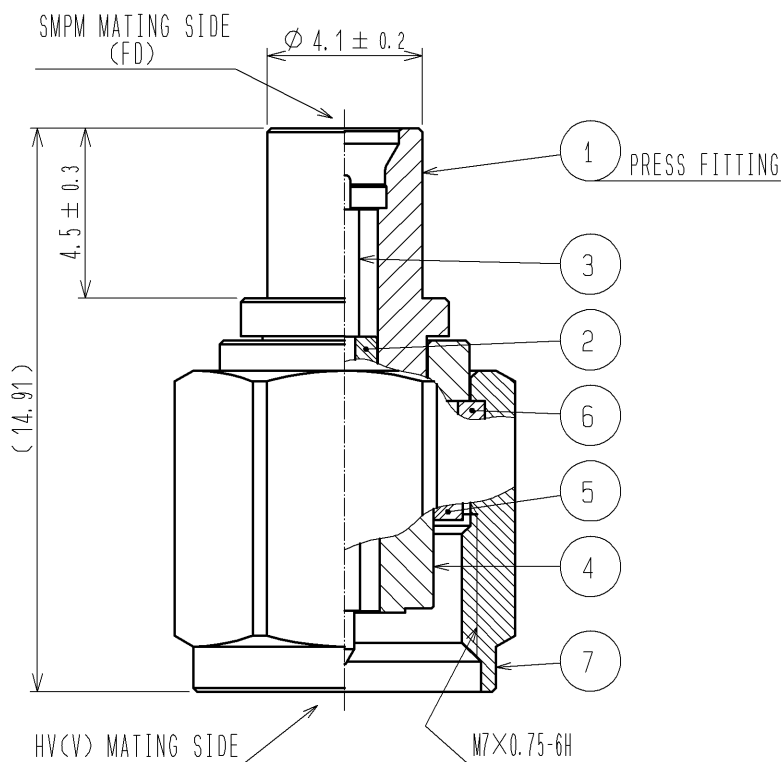


APPLICABLE STANDARD						
RATING	OPERATING TEMPERATURE RANGE	-55°C TO +125°C(95%RH MAX)	STORAGE TEMPERATURE RANGE	-55°C TO +125°C(95%RH MAX)		
	POWER	— W	CHARACTERISTIC IMPEDANCE	50 Ω (0.045 TO 65 GHz)		
	PECULIARITY	—	APPLICABLE CABLE	—		
SPECIFICATIONS						
ITEM	TEST METHOD		REQUIREMENTS		QT	AT
CONSTRUCTION						
GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT.		ACCORDING TO DRAWING.		X	X
MARKING	CONFIRMED VISUALLY.				—	—
ELECTRIC CHARACTERISTICS						
CONTACT RESISTANCE	100 mA MAX (DC OR 1000 Hz).		CENTER CONTACT	16 mΩ MAX.	X	X
			OUTER CONTACT	16 mΩ MAX.	X	X
INSULATION RESISTANCE	250 V DC.		500 MΩ MIN.		X	X
VOLTAGE PROOF	250 V AC FOR 1 min.CURRENT LEAKAGE 2mA MAX.		NO FLASHOVER OR BREAKDOWN.		X	X
RETURN LOSS	FREQUENCY 0.045 TO 65 GHz.		RETURN LOSS	15dB MIN : 0.045 TO 40 GHz 10dB MIN : 40 TO 65 GHz	X	X
INSERTION LOSS	FREQUENCY TO GHz		dB MAX.		—	—
MECHANICAL CHARACTERISTICS						
CONTACT INSERTION AND EXTRACTION FORCES	BY STEEL GAUGE.		INSERTION FORCE	N MAX.	—	—
			EXTRACTION FORCE	NMIN	—	—
INSERTION AND WITHDRAWAL FORCES	MEASURED BY APPLICABLE CONNECTOR.		INSERTION FORCE	N MAX.	—	—
			EXTRACTION FORCE	N MAX.	—	—
MECHANICAL OPERATION	100 TIMES INSERTIONS AND EXTRACTIONS.		1) CONTACT RESISTANCE: CENTER CONTACT 28 mΩMAX.CHANGE OUTER CONTACT 28 mΩMAX.CHANGE 2) NO DAMAGE, CRACK AND LOOSENESS OF PARTS.		X	—
VIBRATION	FREQUENCY 10 TO 500 Hz SINGLE AMPLITUDE 0.75 mm, 98 m/s ² AT 10 CYCLES FOR 3 DIRECTIONS.		1) NO ELECTRICAL DISCONTINUITY OF 1μs. 2) NO DAMAGE, CRACK AND LOOSENESS OF PARTS.		X	—
SHOCK	490 m/s ² DIRECTIONS OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.				X	—
CABLE CLAMP ROBUSTNESS (AGAINST CABLE PULL)	APPLYING A PULL FORCE THE CABLE AXIALLY AT N MAX.		1) NO WITHDRAWAL AND BREAKAGE OF CABLE. 2) NO BREAKAGE OF CLAMP.		—	—
ENVIRONMENTAL CHARACTERISTICS						
DAMP HEAT,CYCLIC	EXPOSED AT -10 TO +65 °C, 90~98 % TOTAL 10 CYCLES (240 h)		1) INSULATION RESISTANCE: 100 MΩ MIN. (AT HIGH HUMIDITY) 2) INSULATION RESISTANCE: 500 MΩ MIN. (AT DRY) 3) NO DAMAGE, CRACK AND LOOSENESS OF PARTS.		X	—
RAPID CHANGE OF TEMPERATURE	TEMPERATURE -65 → — → +125 → — °C TIME 30 → 3 → 30 → 3 min. UNDER 5 CYCLES.		NO DAMAGE, CRACK AND LOOSENESS OF PARTS.		X	—
CORROSION SALT MIST	EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.		NO HEAVY CORROSION		X	—
	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE	
Q						
REMARK			APPROVED	MH. YAMANE	08.07.19	
RoHS COMPLIANT			CHECKED	TS. NOBE	08.07.18	
			DESIGNED	RO. YOKOYAMA	08.07.14	
Unless otherwise specified, refer to JIS C 5402.			DRAWN	RO. YOKOYAMA	08.07.14	
Note QT:Qualification Test AT:Assurance Test X:Applicable Test			DRAWING NO.		ELC4-313091-00	
HRS	SPECIFICATION SHEET		PART NO.	SMPMP (FD) -HVP		
	HIROSE ELECTRIC CO., LTD.		CODE NO.	CL311-0419-5-00		1/1

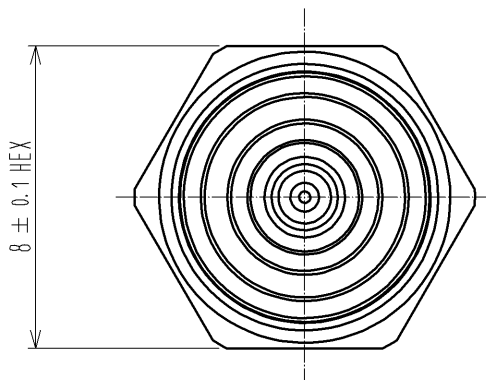

RoHS COMPLIANT

4	STAINLESS STEEL	GOLD PLATING		7	STAINLESS STEEL	PASSIVATE	
3	PHOSPHOR BRONZE	GOLD PLATING		6	BERYLLIUM COPPER	NICKEL PLATING	
2	PTFE			5	SILICONE RUBBER		
1	STAINLESS STEEL	GOLD PLATING					
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS

UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.				APPROVED : MH. YAMANE 08.07.19 CHECKED : TS. NOBE 08.07.18 DESIGNED : RO. YOKOYAMA 08.07.14 DRAWN : RO. YOKOYAMA 08.07.14	DRAWING NO. EDC4-313091-00 PART NO. SMPMP(FD)-HVP CODE NO. CL311-0419-5-00	1/1	