

Panel feed-through - SACC-EC-M12FS-4CON-PG 9/0,5 - 1693791


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sensor/Actuator flush-type socket, 4-pos., M12, A-coded, front/screw mounting with Pg9 thread, can be positioned, with 0.5 m TPE litz wire, 4x 0.34 mm²



Key commercial data

| | |
|------------------------|---|
| Packing unit | 1 |
| Minimum order quantity | 1 |
| Catalog page | Page 27 (PC-2011) |
| GTIN |  4 017918 174323 |
| Custom tariff number | 85444290 |
| Country of origin | GERMANY |

Technical data

General data

| | |
|---------------------------------|--|
| Rated current at 40°C | 4 A |
| Rated voltage | 250 V |
| Number of positions | 4 |
| Volume resistance | ≤ 3 mΩ |
| Insulation resistance | > 100 MΩ |
| Length of cable | 0.5 m |
| Ambient temperature (operation) | -25 °C ... 85 °C (Male connector / female connector) |

General characteristics

| | |
|--------------------------|---------------------------------------|
| Standards/regulations | M12 plug-in connector IEC 61076-2-101 |
| Coding | A - standard |
| Surge voltage category | II |
| Pollution degree | 3 |
| Degree of protection | IP67 |
| Contact material | CuZn |
| Contact surface material | Ni/Au |
| Contact carrier material | PA66 |
| Material, knurls | Nickel-plated brass |

Panel feed-through - SACC-EC-M12FS-4CON-PG 9/0,5 - 1693791

Technical data

General characteristics

| | |
|-------------------|-------------------------------------|
| Sealing material | NBR |
| Mounting type | Front mounting Pg9 With locking nut |
| Connection method | Individual wires |
| Status display | No |

Conductor data

| | |
|------------------------------------|--|
| Cable type | TPE litz wire |
| Conductor cross section | 0.34 mm ² |
| AWG signal line | 22 |
| Conductor structure signal line | 7x 0.25 mm |
| Core diameter including insulation | 1.2 mm ±0.07 mm |
| Thickness, insulation | 0.21 mm |
| Wire colors | brown, white, blue, black |
| Material conductor insulation | TPE |
| Conductor material | Tin-plated Cu litz wires |
| Insulation resistance | ≥ 20 MΩ*km |
| Conductor resistance | ≤ 57.6 Ω/km |
| Nominal voltage, conductor | 300 V |
| Test voltage, conductor | 2000 V AC |
| Ambient temperature (operation) | -25 °C ... 90 °C (cable, fixed installation) |

Classifications

eclass

| | |
|------------|----------|
| eCl@ss 4.0 | 27140815 |
| eCl@ss 4.1 | 27140815 |
| eCl@ss 5.0 | 27143423 |
| eCl@ss 5.1 | 27143423 |
| eCl@ss 6.0 | 27143423 |
| eCl@ss 7.0 | 27449001 |

etim

| | |
|----------|----------|
| ETIM 2.0 | EC001297 |
| ETIM 3.0 | EC002061 |
| ETIM 4.0 | EC002061 |

unspsc

| | |
|---------------|----------|
| UNSPSC 6.01 | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11 | 31251501 |
| UNSPSC 12.01 | 31251501 |
| UNSPSC 13.2 | 31251501 |

Panel feed-through - SACC-EC-M12FS-4CON-PG 9/0,5 - 1693791

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / GOST / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

| | |
|--------------------------------|-------|
| UL Recognized | |
| mm ² /AWG/kcmil | 26-2 |
| Nominal current I _N | 4 A |
| Nominal voltage U _N | 250 V |

| | |
|--------------------------------|-------|
| cUL Recognized | |
| Nominal current I _N | 4 A |
| Nominal voltage U _N | 300 V |

| | |
|------|--|
| GOST | |
|------|--|

| | |
|------------------|--|
| cULus Recognized | |
|------------------|--|

Accessories

Accessories

Assembly

Panel feed-through - SACC-EC-M12FS-4CON-PG 9/0,5 - 1693791

Accessories


Flat nut - SACC-E-MU-PG9 - 1504084



Flat nut with Pg9 thread


Drawings

Dimensioned drawing




Housing cutout for Pg9 fastening thread, mounting panel with thread

Schematic diagram




Pin assignment M12 socket, 4-pos., A-coded, view female side

Dimensioned drawing



M12 flush-type connector, can be positioned

Circuit diagram

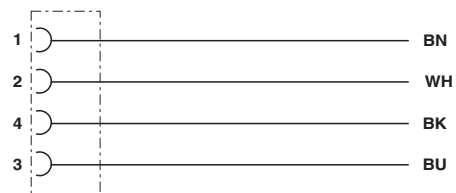

Contact assignment of the M12 socket