


MULTILAYER BALUN SPECIFICATION

P/N: **HHM1603A1**

[MECHANICAL DIMENSIONS]

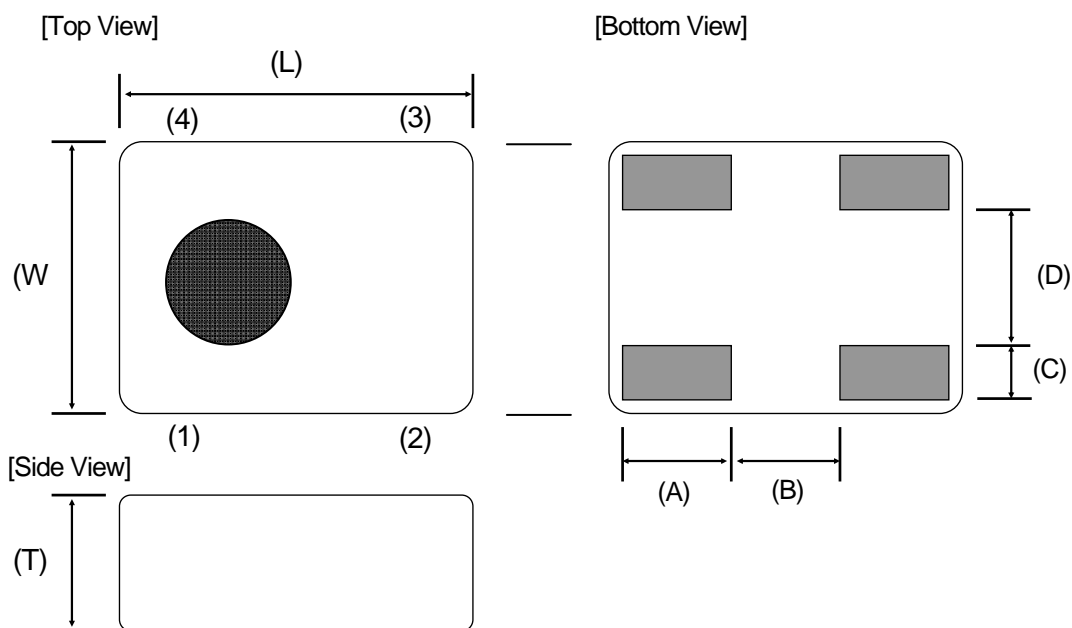

Mark	Dimension	Mark	Dimension
L	0.65 ± 0.05	B	0.20 ± 0.05
W	0.50 ± 0.05	C	0.115 ± 0.05
T	0.25 ± 0.05	D	0.21 ± 0.05
A	0.20 ± 0.05		

Pin function
 (1) GND
 (2) Unbalance
 (3) Balance
 (4) Balance

[ELECTRICAL CHARACTERISTICS]

No	Parameter	Spec	Typical Value	Unit
1	Unbalanced Impedance	50	-	Ohm
2	Balanced Impedance	100	-	Ohm
3	Frequency Range	2300 - 2700	-	MHz
4	Unbalanced Port Return Loss	10 Min. (VSWR 1.92 Max.)	24 (VSWR 1.14)	dB
5	Phase Imbalance at Balanced Port	180 ± 10	180 ± 2.6	deg
6	Amplitude Imbalance at Balanced Port	0 ± 2.0	0 ± 1.17	dB
7	Insertion Loss	0.50 Max.	0.27	dB

[TEMPERATURE RANGE]


Storage Temperature	$-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Operating Temperature	$-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Note: All specifications are subject to change and are not guaranteed.


[FREQUENCY CHARACTERISTICS]

Typical Data


Return Loss

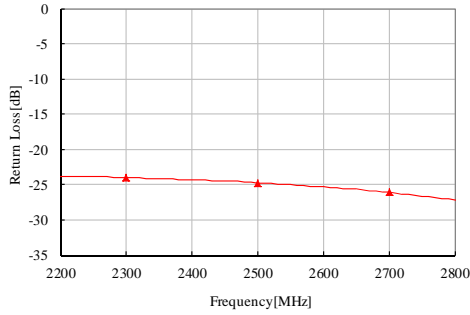


Amplitude Balance

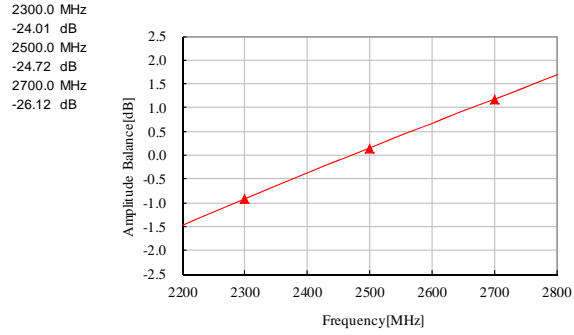

Insertion Loss

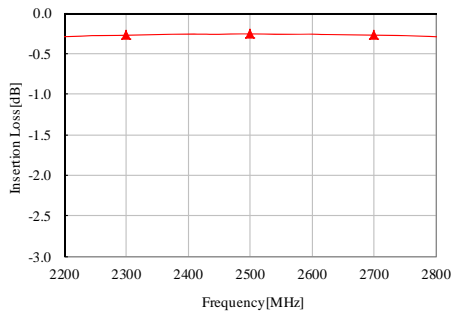

Phase Balance

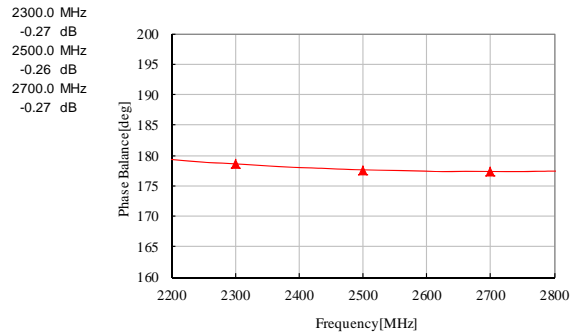

[RECOMMENDED LANDPATTERN]

