


G2E108 Series Centrifugal Blower

Ø 108mm

- AC single inlet, forward curved centrifugal blower. Via a bracket, the integrated external-rotor motor is mounted on one side of the housing.
- Housing of die-cast aluminium; impeller of galvanised sheet-steel. Forwardcurved impellers are directly press-fitted onto the rotor of the external-rotor motor.
- Direction of rotation is CW as seen from suction side. Insulation class "B".
- Maintenance-free ball bearings.
- UL, CSA, VDE approvals on some models, please contact application engineering.

Part Number	Curve	CFM @ 0	VAC	Hertz	Power (W)	dBA	Max Amb. Temp. C	Bearing Type	Features	Capacitor (µF)	Wgt. (lbs)
G2E108-AA05-44	1	91	115	60	35	54	55	Ball	Leads	4	3.00
G2E108-AA01-32	1	91	230	60	50	54	55	Ball	Leads	1.5	3.00

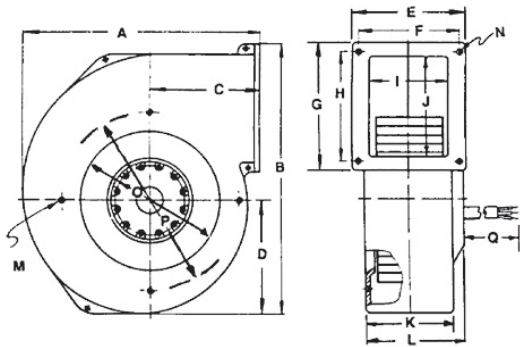

DIMENSIONS - inches (mm)

PART NUMBER	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
G2E108-AA05-44	6.26	7.20	3.11	2.80	4.53	3.82	3.27	2.60									
G2E108-AA01-32	(159)	(183)	(79)	(71)	(115)	(97)	(83)	(66)									
									2.99	1.97	3.23	3.23	M4	.314	3.43	4.65	11.81
									(76)	(50)	(82)	(82)	-	(8)	(87)	(118)	(300)

