

BTK-3P(5.5)



ORDERING CODE

B T K - 3 P
 ① ② ③ ④

- ① Magnetic Buzzer
- ② Series Number
- ③ Rated Voltage
- ④ None : Pin




No	Specification	Data
1	Rated Voltage (V)	3
2	Operating Voltage (V)	2~5
3	Resonant Frequency (Hz)	2700±300
4	*Sound Output at 10cm (dB)	Min 80
5	*Current Consumption (mA)	Max 30
6	Operating Temperature (°C)	-20 ~ +70
7	Storage Temperature (°C)	-30 ~ +80
8	Weight (g)	1g
9	Housing Material	PPO
10	RoHS	Yes
11	Packing Quantity	100pcs/box

*Applying rated voltage (Resonant frequency, 1/2 duty, Square wave)

DIMENSIONS (unit : mm)

*Tolerance : ±0.5mm Except Specified

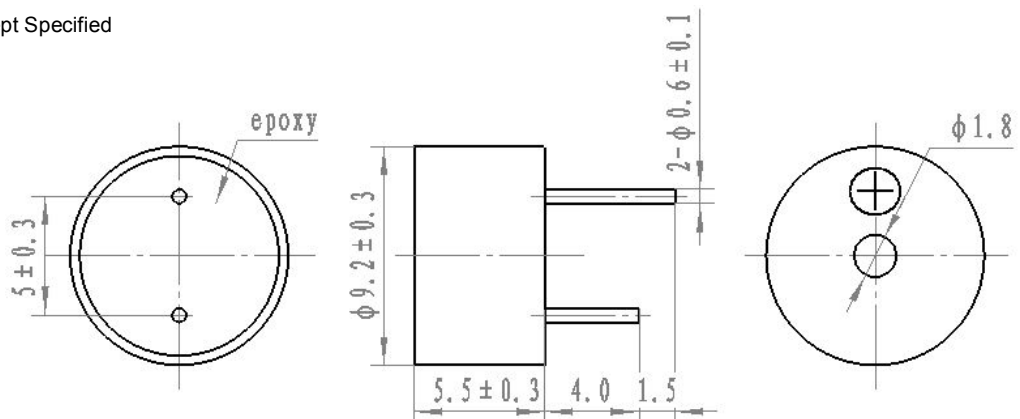

BTK-5P(5.5)



ORDERING CODE

B T K - 5 P
 ① ② ③ ④

- ① Magnetic Buzzer
- ② Series Number
- ③ Rated Voltage
- ④ None : Pin



No	Specification	Data
1	Rated Voltage (V)	5
2	Operating Voltage (V)	3~7
3	Resonant Frequency (Hz)	2700±300
4	*Sound Output at 10cm (dB)	Min 85
5	*Current Consumption (mA)	Max 30
6	Operating Temperature (°C)	-20 ~ +70
7	Storage Temperature (°C)	-30 ~ +80
8	Weight (g)	1g
9	Housing Material	PPO
10	RoHS	Yes
11	Packing Quantity	100pcs/box

*Applying rated voltage (Resonant frequency, 1/2 duty, Square wave)

DIMENSIONS (unit : mm)

*Tolerance : ±0.5mm Except Specified

