



# DK2.5N-TG

DIN

&gt;

:2021-09-08

:1.2

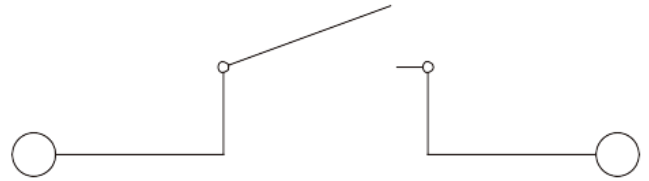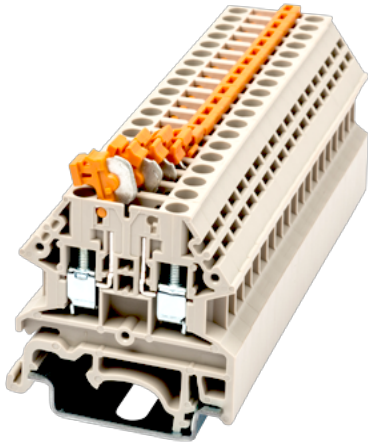

M2.5, 300V, 20A, Beige (default)

	DIN rail terminal blocks, Disconnect terminal blocks
	Disconnect terminal blocks
	Beige (default)
	Screw connection
	Rail mounting
(mm)	5.1
(mm)	40.7
(mm)	39.5
	Single level
	2
	PA
	I
UL 94	V0
	-IEC
(V)	400



(A)	24
(III/2)(V)	400
(II/2)(KV)	6
(III/2)(KV)	6
(III/3)(KV)	6
(mm <sup>2</sup> )	0.34
(mm <sup>2</sup> )	4
(mm <sup>2</sup> )	0.34
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> ) , ,	0.34
(mm <sup>2</sup> ) , ,	2.5
(mm <sup>2</sup> ) , ,	0.34
(mm <sup>2</sup> ) , ,	2.5
2 (mm <sup>2</sup> )	2.5
2 (mm <sup>2</sup> )	2.5
(mm <sup>2</sup> ) <sup>2</sup> , ,	0.34
(mm <sup>2</sup> ) <sup>2</sup> , ,	1
<sup>2</sup> (mm <sup>2</sup> ) , ,	0.5
<sup>2</sup> (mm <sup>2</sup> ) , ,	1
	M2.5
Width)(mm) (Blade thickness x	0.6x3.5
Philips	PH1
(N.m)	0.4
	9~11
	TS-35
	YES
	NO
<b>-UL</b>	
(UL/CUL Group B)(V)	300



(UL/CUL Group B)(A)		20
UL/CUL	AWG	22
UL/CUL	AWG	12
UL/CUL	AWG	22
UL/CUL	AWG	12






&

(YES or NO)		YES
가 (YES or NO)		YES
		120
		-40

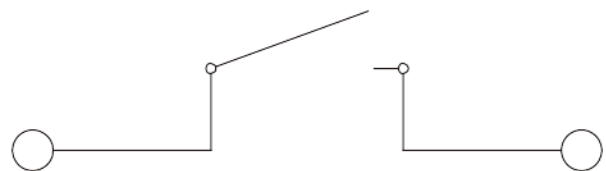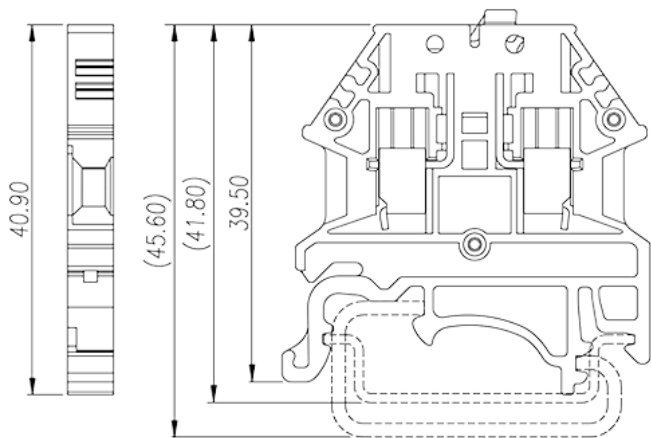VDE

(mm <sup>2</sup> )		0.34~2.5
(V)		400
(A)		24



	<p><b>TS-35</b> DIN-Rail For DP / DP-PE / DK / DK-PE / AK / AK-PE / AK..P series. Material is iron. Length of 1000mm / 2000mm.</p>
	<p><b>DK4NC</b> End cover For DK2.5N / DK4N / DK2.5N-TP / DK2.5N-TG / DK2.5N-CP / DK4N-TP / DK4N-TG / DK4N-CP Grey color. Using UL94-V0 class of insulation material.</p>
	<p><b>CSC-2.5XXPN</b> Insertion Bridge For DK2.5N/DK2.5N-TN/DK2.5N-TR/DK2.5D/DKK2.5N. Gray color. Using UL94-V0 class of insulation material.</p>
	<p><b>AKP-TG</b> Feed through connector For AK2.5-TG / AK4-TG / AK2.5-TN-TG / AK2.5-TR-TG / DK2.5N-TG / DK4N-TG / DKK2.5N-TG / DKK4N-TG. Orange color. Using UL94-V0 class of insulation material.</p>
	<p><b>TM47W</b> Marking Label For BEST APPLICATION : DP2.5, DP2.5-TN, DP2.5-TR, DP2.5-PE, DP2.5-TN-PE, DP2.5-TR-PE, DP2.5/1P, DK2.5N, DK2.5N-TN, DK2.5N-TR, DKK2.5N, DKK2.5N-PV, DK2.5N-PE, DK2.5N-TN-PE, DK2.5N-TR-PE, DK2.5N-TP, DK2.5N-TG, DK2.5N-CP, DKK2.5N-TP, DKK2.5N-TG, DKK2.5N-CP, PM2.5N AVAILABLE APPLICATION : DK2.5-PE, DKES1.5, DKES1.5-XXP, DKES1.5M-XXP White color. Using UL94-V2 class of insulation material.</p>