
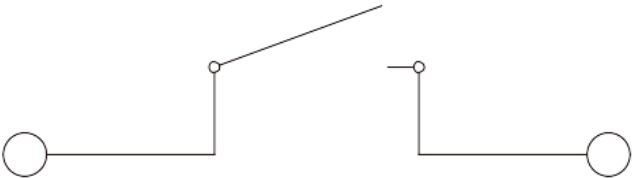


DK4N-TG

DIN >

:2021-09-08

:1.2

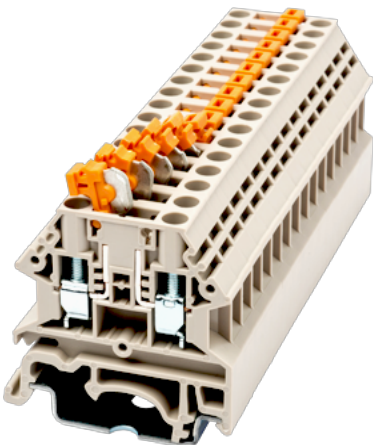

M3, 300V, 30A, Beige (default)

	DIN rail terminal blocks, Disconnect terminal blocks
	Disconnect terminal blocks
	Beige (default)
	Screw connection
	Rail mounting
(mm)	6.1
(mm)	40.7
(mm)	40.9
	Single level
	2
	PA
	I
UL 94	V0
-IEC	
(V)	400

(A)	32
(III/2)(V)	400
(II/2)(KV)	6
(III/2)(KV)	6
(III/3)(KV)	6
(mm ²)	0.34
(mm ²)	6
(mm ²)	0.34
(mm ²)	6 (4 mm ² for finely stranded wire)
(mm ²) , ,	0.34
(mm ²) , ,	4
(mm ²) , ,	0.34
(mm ²) , ,	4
2 (mm ²)	2.5
2 (mm ²)	2.5
(mm ²) ² , ,	0.34
(mm ²) ² , ,	1.5
(mm ²) ² , ,	0.5
(mm ²) ² , ,	2.5
	M3
Width)(mm) (Blade thickness x	0.6x3.5
Philips	PH1
(N.m)	0.6
	9~11
	TS-35
	YES
	NO
-UL	
(UL/CUL Group B)(V)	300


(UL/CUL Group B)(A)		30
UL/CUL	AWG	22
UL/CUL	AWG	10
UL/CUL	AWG	22
UL/CUL	AWG	10






&

(YES or NO)		YES
가	(YES or NO)	YES
		120
		-40

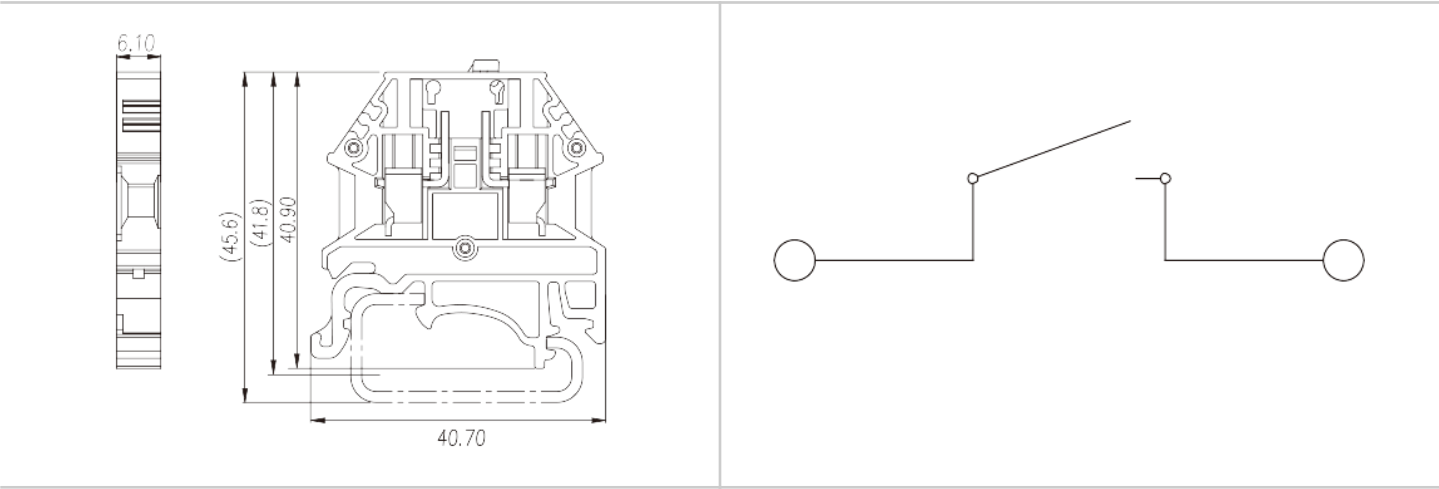VDE

(mm ²)	0.34~4
(V)	400
(A)	32



	<p>TS-35 DIN-Rail For DP / DP-PE / DK / DK-PE / AK / AK-PE / AK..P series. Material is iron. Length of 1000mm / 2000mm.</p>
	<p>DK4NC End cover For DK2.5N / DK4N / DK2.5N-TP / DK2.5N-TG / DK2.5N-CP / DK4N-TP / DK4N-TG / DK4N-CP Grey color. Using UL94-V0 class of insulation material.</p>
	<p>CSC-4XXPN Insertion Bridge For DK4N / DK4N-TN / DK4N-TR / DK4N-TP / DK4N-TG / DK4D / DKK4N. Grey color. Using UL94-V0 class of insulation material.</p>
	<p>AKP-TG Feed through connector For AK2.5-TG / AK4-TG / AK2.5-TN-TG / AK2.5-TR-TG / DK2.5N-TG / DK4N-TG / DKK2.5N-TG / DKK4N-TG. Orange color. Using UL94-V0 class of insulation material.</p>
	<p>TM48W Marking Label For DP4, DP4-TN, DP4-TR, DP4-PE, DP4-TN-PE, DP4-TR-PE, SS2 DK4N, DK4N-TN, DK4N-TR, DKK4N, DKK4N-PV, DK4N-PE, DK4N-TN-PE, DK4N-TR-PE, DK4-PE, DK4N-TP, DK4N-TG, DK4N-CP, DKK4N-TP, DKK4N-TG, DKK4N-CP, PM4N White color. Using UL94-V2 class of insulation material.</p>