



DKK4N

DIN

>

:2021-09-08

:1.2

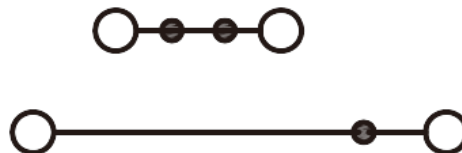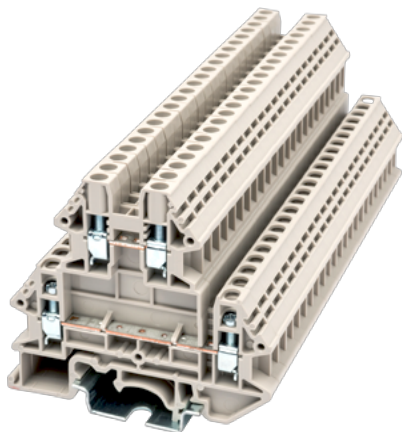

M3, 600V, 30A, Beige (default)

	DIN rail terminal blocks, Bi level feed through terminal blocks
	Bi level feed through terminal blocks
	Beige (default)
	Screw connection
	Rail mounting
(mm)	6.1
(mm)	71.5
(mm)	63
	Double level
	4
	PA
	I
UL 94	V0

-IEC



(V)		800
(A)		32
(III/2)(V)		800
(II/2)(KV)		8
(III/2)(KV)		8
(III/3)(KV)		8
(mm ²)		0.34
(mm ²)		6
(mm ²)		0.34
(mm ²)		4
(mm ²)	'	0.34
(mm ²)	'	4
(mm ²)	'	0.34
(mm ²)	'	4
2	(mm ²)	2.5
2	(mm ²)	2.5
(mm ²)	2	0.34
(mm ²)	2	1.5
(mm ²)	2	0.5
(mm ²)	2	1.5
		M3
Width)(mm)	(Blade thickness x	0.6x3.5
Philips		PH1
(N.m)		0.6
		9~11
		TS-35
		YES
		NO

-UL



(UL/CUL Group B)(㉿)	6300
UL/CUL AWG	22
UL/CUL AWG	10
UL/CUL AWG	22
UL/CUL AWG	10







&

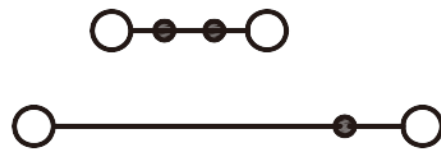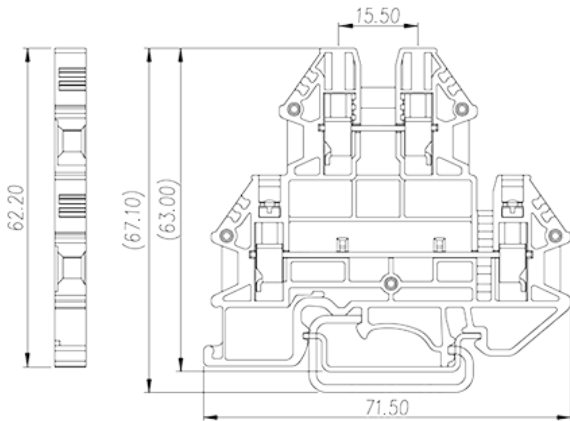(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

VDE

(mm ²)	0.34~4
(V)	800
(A)	32



	<p>DSS4N-XXP Plug-in bridge For DK4N / DK4N-TN / DK4N-TR / DK4D / DKK4N. Red color. Using UL94-V0 class of insulation material.</p>
	<p>TS-35 DIN-Rail For DP / DP-PE / DK / DK-PE / AK / AK-PE / AK..P series. Material is iron. Length of 1000mm / 2000mm.</p>
	<p>DKNSPS-001 Partition Plate For DK2.5N / DK4N. Grey color. Using UL94-V0 class of insulation material.</p>
	<p>CSC-4XXPN Insertion Bridge For DK4N / DK4N-TN / DK4N-TR / DK4N-TP / DK4N-TG / DK4D / DKK4N. Grey color. Using UL94-V0 class of insulation material.</p>
	<p>TM48W Marking Label For DP4, DP4-TN, DP4-TR, DP4-PE, DP4-TN-PE, DP4-TR-PE, SS2 DK4N, DK4N-TN, DK4N-TR, DKK4N, DKK4N-PV, DK4N-PE, DK4N-TN-PE, DK4N-TR-PE, DK4-PE, DK4N-TP, DK4N-TG, DK4N-CP, DKK4N-TP, DKK4N-TG, DKK4N-CP, PM4N White color. Using UL94-V2 class of insulation material.</p>
	<p>DKK2.5NC End Cover For DKK2.5N / DKK4N / DKK2.5N-PV / DKK4N-PV / DKK2.5N-TP / DKK2.5N-TG / DKK2.5N-CP / DKK4N-TP / DKK4N-TG / DKK4N-CP Grey color. Using UL94-V0 class of insulation material.</p>