



# DP1.5-TN

DIN

&gt;

:2021-09-08

:1.1

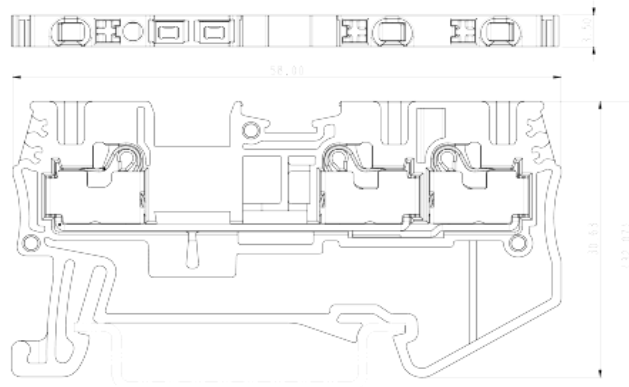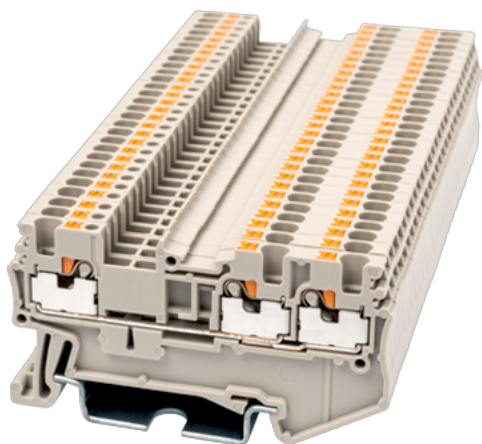

300V, 15A, Beige (default)

	Single level Feed-Through Terminal Block, Push-in Design
	Single level Feed Through Terminal Block
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	58
(mm)	3.5
(mm)	30.6
( )	1P
	Single level
	3
	PA
	I
UL 94	V0
	500M at DC 500V

**-IEC**

(V)	500
(A)	17.5
(III/3)(V)	500
(III/3)(KV)	6
(mm <sup>2</sup> )	0.14
(mm <sup>2</sup> )	1.5
(mm <sup>2</sup> )	0.14
(mm <sup>2</sup> )	1.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	1.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	0.75
Width)(mm) (Blade thickness x	0.4x2.5
	8
	TS-35
	YES
	NO

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	15
(UL/CUL Group C)(V)	300
(UL/CUL Group C)(A)	15
UL/CUL AWG	26
UL/CUL AWG	14
UL/CUL AWG	26
UL/CUL AWG	14

**&**

(YES or NO)	YES
가 (YES or NO)	YES

	120
	-40

## UL

(Group B)(AWG)	26~14
(Group B)(V)	300
(Group B)(A)	15
(Group C)(AWG)	26~14
(Group C)(V)	300
(Group C)(A)	15


## CUL





(Group B)(AWG)	26~14
(Group B)(V)	300
(Group B)(A)	15
(Group C)(AWG)	26~14
(Group C)(V)	300
(Group C)(A)	15



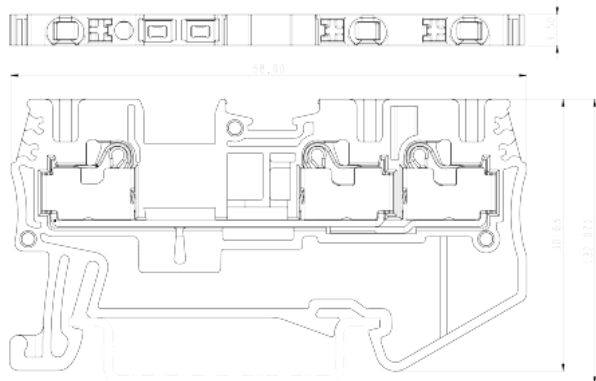



## VDE

(mm <sup>2</sup> )	0.14~1.5
(V)	500
(A)	17.5





	<p><b>TS-35C</b>  DIN rail end cap  For TS-35 rail. Black color. Using UL94-V2 class of insulation material.</p>
	<p><b>DSD03-1.5/2.5</b>  Plug-in bridge  For DP1.5 / DP2.5 / DP1.5-TN / DP2.5-TN / DP1.5-TR / DP2.5-TR Red color.  Using UL94-V0 class of insulation material.</p>
	<p><b>DSD03-1.5XX</b>  Plug-in bridge  For DP1.5/DP1.5-TR/DP1.5-TN Red color. Using UL94-V0 class of insulation material.</p>
	<p><b>AKSPS-003</b>  Partition</p>

	<p>insulation material.            For AK1.5-TN / AK2.5-TR / AK4-TN / AK2.5-TP / AK2.5-TG / AK4-TG / AK2.5-CP / AK4-CP / AK4-TF(5X20) Gray color. Using UL94-V0 class of <b>TS-35</b>            DIN-Rail            For DP / DP-PE / DK / DK-PE / AK / AK-PE / AK..P series. Material is iron. Length of 1000mm / 2000mm.</p>
	<p><b>DSD03-1.5/4</b>            Plug-in bridge            For DP1.5 / DP4 / DP1.5-TN / DP4-TN / DP1.5-TR / DP4-TR Red color. Using UL94-V0 class of insulation material.</p>
	<p><b>SS11</b>            End Bracket            For TS-35, TS-35/15 rails. Grey color. Using UL94-V0 class of insulation material.</p>
	<p><b>TM41W</b>            Marking Label            For DP1.5,DP1.5-TN,DP1.5-TR,DP1.5-PE,DP1.5-TN-PE,DP1.5-TR-PE White color. Using UL94-V2 class of insulation material.</p>
	<p><b>TM46W</b>            Marking Label            For DP1.5,DP1.5-TN,DP1.5-TR,DP1.5-PE,DP1.5-TN-PE,DP1.5-TR-PE White color. Using UL94-V2 class of insulation material.</p>
	<p><b>DP1.5C-TN</b>            End Cover            For DP1.5-TN Grey color. Using UL94-V0 class of insulation material.</p>