



DP16-PE

DIN

>

:2021-09-08

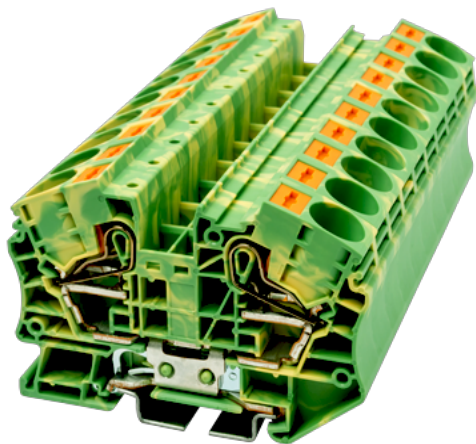

600V, Green-Yellow (default)

	Grounding Terminal Block, Push-in Design
	Grounding Terminal Blocks
	Green-Yellow (default)
	Push-in Design
	Rail Mounting
(mm)	76.5
(mm)	12
(mm)	53.1
()	1P
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC

(V)		1000
(III/3)(V)		1000
(III/3)(KV)		8
(mm ²)		0.5
(mm ²)		25
(mm ²)		0.5
(mm ²)		16
(mm ²)	,	0.5
(mm ²)	,	16
(mm ²)	,	0.5
(mm ²)	,	16
	² (mm ²) ,	1.5
	² (mm ²) ,	4
Width)(mm)	(Blade thickness x	1.0x5.5
		18
		TS-35
		YES
		YES


-UL

(UL/CUL Group B)(V)		600
(UL/CUL Group C)(V)		600
UL/CUL	AWG	20
UL/CUL	AWG	4
UL/CUL	AWG	20
UL/CUL	AWG	4





&

(YES or NO)		YES
가 (YES or NO)		YES

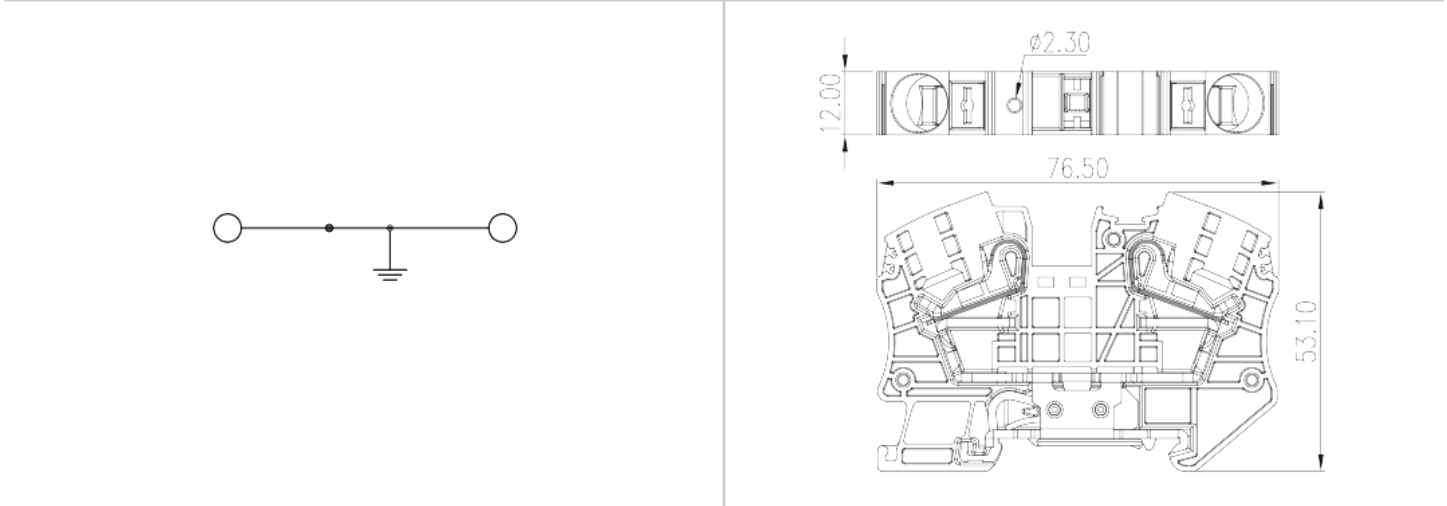	120
	-40



	<p>TS-35C DIN rail end cap For TS-35 rail. Black color. Using UL94-V2 class of insulation material.</p>
	<p>AKSPS-001 Partition Plate For AK1.5 / AK2.5 / AK4 / DP1.5 / DP2.5 / DP4 Gray color. Using UL94-V0 class of insulation material.</p>
	<p>TS-35 DIN-Rail</p>

	<p>Length of 1000mm / 2000mm. For DP / DP-PE / DK / DK-PE / AK / AK-PE / AK..P series. Material is iron.</p>
	<p>SS11 End Bracket For TS-35, TS-35/15 rails. Grey color. Using UL94-V0 class of insulation material.</p>
	<p>DSD01-16XXN Plug-in bridge For AK16 / AK16-TN. Red color. Using UL94-V0 class of insulation material.</p>
	<p>TM45W Marking Label For BEST APPLICATION : DP10, DP10-TN, DP10-PE, DP10-TN-PE AVAILABLE APPLICATION : DP16, DP16-PE, DK10-TF(5X20) White color. Using UL94-V2 class of insulation material.</p>
	<p>TM50W Marking Label For BEST APPLICATION : DP10, DP10-TN, DP10-PE, DP10-TN-PE AVAILABLE APPLICATION : DP16, DP16-PE White color. Using UL94-V2 class of insulation material.</p>