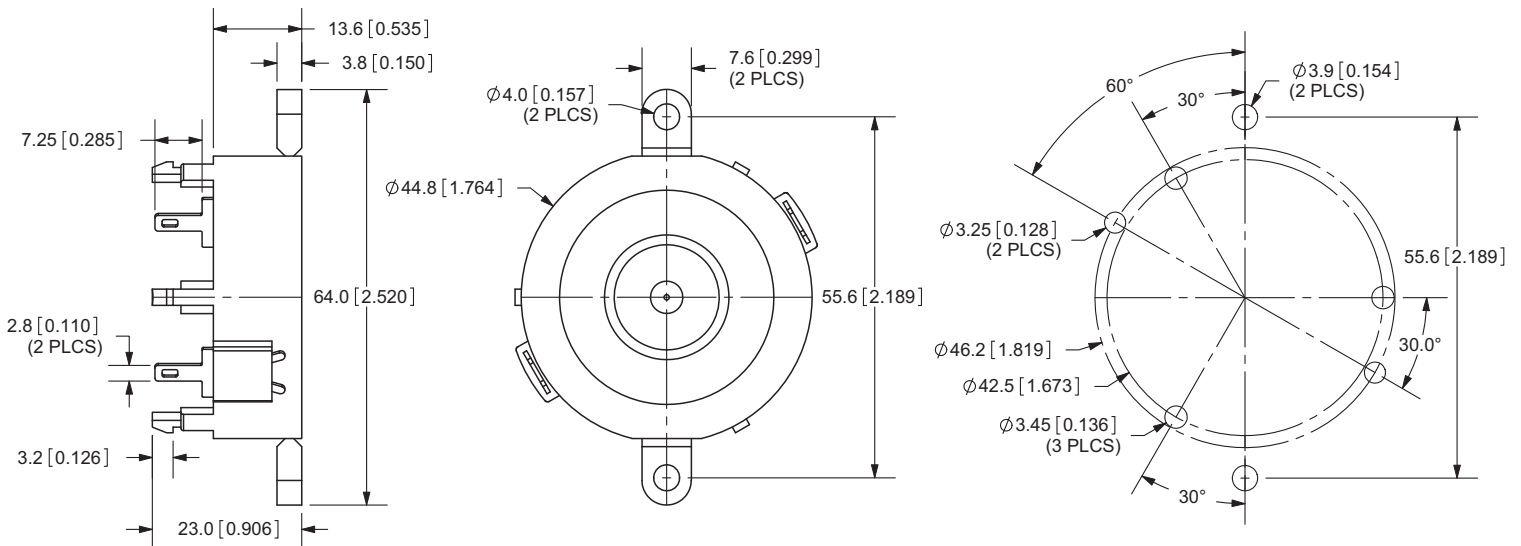


**PART NUMBER: CPE-4485****DESCRIPTION: PIEZO AUDIO TRANSDUCER****SPECIFICATIONS**

parameter	conditions/description	min	nom	max	units
operating frequency		2.2		4	K Hz
operating voltage	continuous sine wave continuous square wave intermittent sine wave intermittent square wave		85 50 100 60		V p-p V p-p V p-p V p-p
sound pressure level	at 30 cm / 12 V p-p, square wave, 3000 Hz	100			dBa
electrostatic capacity	at 120 Hz, 1 V	0.1645	0.235	0.3055	uF
operating temperature		-40		105	°C
storage temperature		-40		105	°C
dimensions	ø44.8 x H13.6 mm				
weight				11.5	g
material	PBT + 15% GLASS UL94 V-0 (black)				
terminal	pin type				
RoHS	yes				


**APPEARANCE DRAWING**

TOLERANCE:  
 $\pm 0.5$ mm UNLESS OTHERWISE  
 SPECIFIED


PART NUMBER: CPE-4485

DESCRIPTION: PIEZO AUDIO TRANSDUCER

### FREQUENCY RESPONSE

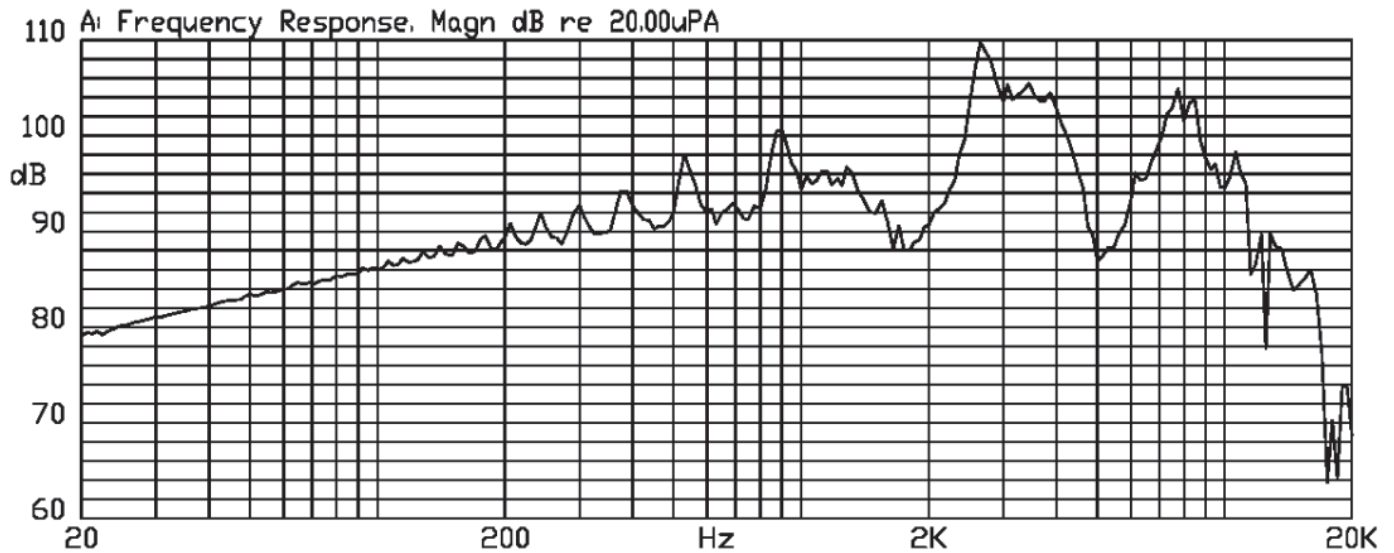

### MEASUREMENT METHOD

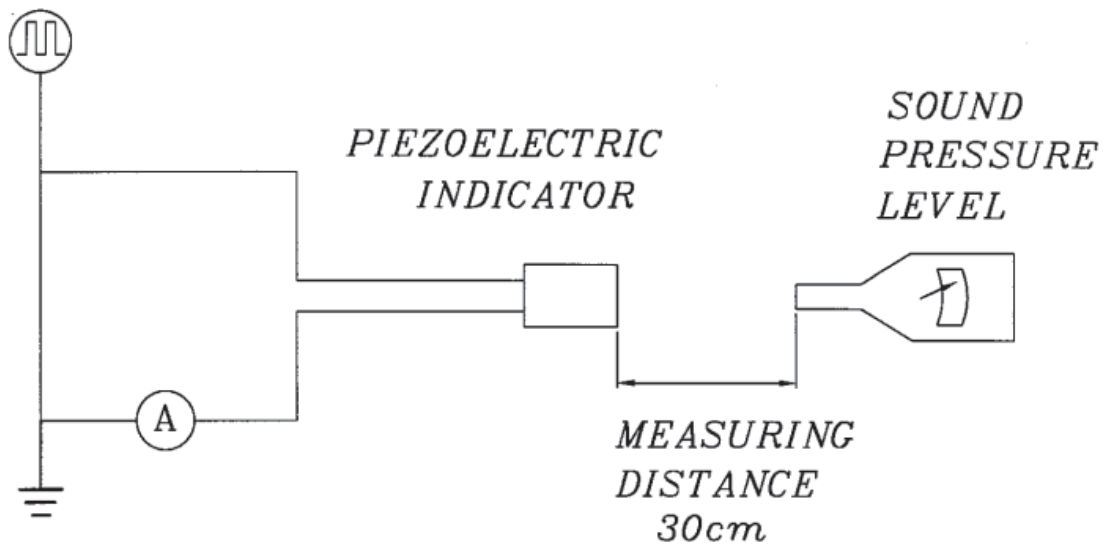

S.P.L. Measuring Circuit  
Input signal: 12 V p-p, 3.0 kHz, square wave  
Mic: RION S.P.L. meter UC30 or equivalent  
S.G.: Hewlett Packard 33120A function generator or equivalent



**PART NUMBER: CPE-4485**

**DESCRIPTION: PIEZO AUDIO TRANSDUCER**

## MECHANICAL CHARACTERISTICS

item	test condition	evaluation standard
solderability <sup>1</sup>	Lead terminals are immersed in rosin for 5 seconds and then immersed in a solder bath of +270 ±5°C for 3 ±1.0 second.	90% min. of the lead terminals will be wet with solder. (except the edge of the terminal)
soldering heat resistance	Lead terminals are immersed up to 1.5 mm from the buzzer's body in a solder bath of 260 ±5°C for 3 ±1 seconds.	No interference in operation.
terminal pull strength	The force of 9.8 N is applied for 10 sec. to each terminal in axial direction.	No damage or cutting off.
vibration test	The buzzer should be measured after a vibration amplitude of 1.5 mm with 10 ~ 55 Hz band of vibration frequency to each of the 3 perpendicular directions for 2 hours.	The buzzer will be measured after being placed at +25°C for 4 hours. The value of oscillation frequency / current consumption should be ±10% of the initial measurements. The SPL should be within ±10dB compared with the initial measurement.
drop test	The buzzer without packaging is subjected to 3 drops on each axis from the height of 75 cm onto a 40 mm thick wooden board.	

Notes: 1. Not recommended for wave soldering

## ENVIRONMENT TEST

item	test condition	evaluation standard
high temperature test	After being placed in a chamber at +105°C for 240 hours.	The buzzer will be measured after being placed at +25°C for 4 hours. The value of the oscillation frequency / current consumption should be ±10% compared to the initial measurements. The SPL should be within ±10dB compared to the initial measurements.
low temperature test	After being placed in a chamber at -40°C for 240 hours.	
humidity test	After being placed in a chamber at +40°C and 90 ±5% RH for 240 hours.	
temperature cycle test	The part will be subjected to 5 cycles. One cycle will consist of:	

## RELIABILITY TEST

item	test condition	evaluation standard
operating (life test)	<p>1. Continuous life test: The part will be subjected to 48 hours of continuous operation at 90°C with rated voltage applied.</p> <p>2. Intermittent life test: A duty cycle of 1 minute on, 1 minute off, a minimum of 5,000 times at room temp (+25 ±2°C) with rated voltage applied.</p>	The buzzer will be measured after being placed at +25°C for 4 hours. The value of oscillation frequency / current consumption should be ±10% of the initial measurements. The SPL should be within ±10dB compared with the initial measurement.

## TEST CONDITIONS

standard test conditions	a) Temperature: +5 ~ +35°C	b) Humidity: 45 ~ 85%	c) Pressure: 860 ~ 1060 mbar
judgement test conditions	a) Temperature: +25 ±2°C	b) Humidity: 60 ~ 70%	c) Pressure: 860 ~ 1060 mbar

PART NUMBER: CPE-4485

DESCRIPTION: PIEZO AUDIO TRANSDUCER

**PACKAGING**

